

# MasterCue V<sup>6</sup> USB

**MasterCue V<sup>6</sup>** is the latest version of our flagship MasterCue range, continuing to ensure reliable Professional Cueing for the Professional Presentation Industry. V<sup>6</sup> has grown from the success of the V<sup>5</sup> and also incorporates our clients' valuable feedback on what they require from their systems.

Version V<sup>6</sup> has 3 USB ports for independent control of 3 USB compliant computers be it PC, MAC, Linux etc. With intercom available in both mono and stereo headsets we have provided both 4 pin and 5 pin loop through so the tones can be heard in either the left or the right ear of the systems. A Confidence lamp is now standard following clients requests to use this on the large shows. Auto orientation is available to maintain the screen graphics whether the unit is horizontal or vertical. Wired button for full back up has always, and will continue to be, supplied to ensure full and complete back up as standard.

For easy rack fitting, the unit can also be fitted with rack mount ears.


## Main features

- 3 individually enabled USB ports for computer control
- Intercom loop through for mono and stereo headsets
- Confidence lamp for presenter to prove operation
- Wired button for full back up as standard
- Auto rotate of display to ensure H or V orientation

**2 Year Limited Factory Warranty**



*When a Missed Cue  
is Simply Not an Option!*

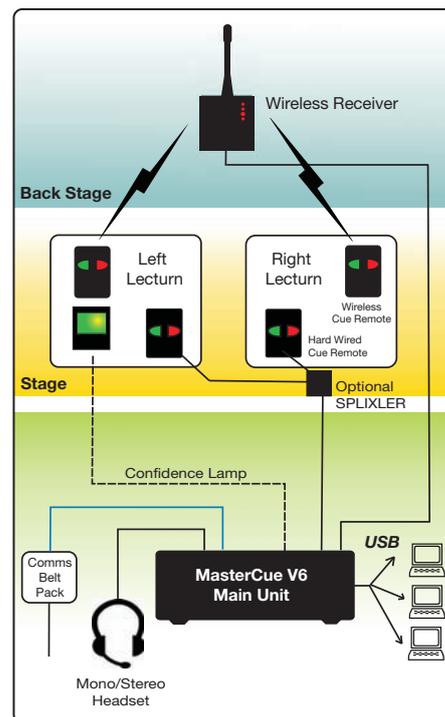

Interspace Industries

Unit 1A, 126 Great North Road, Hatfield, Hertfordshire AL9 5JN, UK

call: +44 (0) 870 770 8088, Fax: +44 (0) 870 770 8089

email: [moreinfo@interspaceind.com](mailto:moreinfo@interspaceind.com) web: [www.interspaceind.com](http://www.interspaceind.com)



## Specifications

### Signals:

RF 434.075Mhz  
 RF signal type FM FSK  
 Audio out Balanced 600 Ohms 1Vp-p Variable  
 12V switching signal on peripherals

### Connectors:

RF Receiver: BNC for aerial and XLR female  
 Main unit: male XLR for RF Receiver input  
 Female XLR for wired button input  
 Male XLR for confidence lamp  
 Audio Intercom, loop through for 4 pin and 5 pin XLR, Male and Female.  
 ¼" jack socket for balanced output'  
 3x USB series B connector for Computer control  
 1x USB series A connector for keyboard programming

### Accessories Included:

2x Wireless remotes (2 button)  
 1x RF receiver  
 1x Aerial  
 1x Hand-wired remote  
 3x USB series A-B cables  
 1x 4 pin Comms cable  
 1x 5 pin loop through Comms cable  
 1 x Mains Lead/Power cord  
 1x Confidence Lamp

### Required user parts:

¼" Stereo headphones if discreet tone is required or cable to external device (Audio Desk Recording device)  
 All 3 Pin XLR

### Dimensions and weights mm (inch):

Main Unit DxWxH: 160 (6 ¼") x 255 (10") x 93 (3 5/8") (inc feet)  
 Weight: 1050g (2.31lbs)

### Transmitters

DxWxH: 100 (4") x 65 (2 ½") x 25 (1")  
 Weight: 100g (3.6oz)

### RF Receiver

DxWxH: 90 (3 ½") x 90 (3 ½") x 50 (2")  
 Weight: 178g (6.3oz)

### Wired buttons

DxWxH: 90 (3 ½") x 60 (2 4/10th") x 33 (1 3/10th")  
 Weight: 166g (5.9oz)

### Aerial

LxDia: 142mm (5 9/16") x 14mm (17/32")  
 (433 MHz)

Weight: 25g (1oz)

### Power:

International Power Supply 100-240VAC  
 1.0A Max 8W Max 47-63Hz IEC connector

### Available Options:

#### Additional handsets

Up to 16 units of 1 or 2 button handsets can be used on V6 to each RF receiver.



#### Cue4

Up to 4 Cue4 units can be attached to the Main unit to give 19 computer to control.



#### Universal stand

Great for Confidence stand and RF receiver.



#### Splixler

To add extra wired handsets to V6 use Splixler.



#### Wired Buttons

For when you need extra back up and safety.

