


**Kramer Electronics, Ltd.**

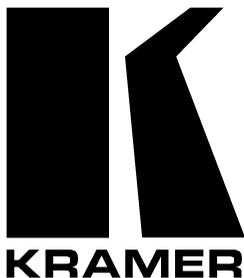

# **USER MANUAL**

**VM-2HD**

*HD/SD – SDI DA*

## Contents

<b>1</b>	<b>Introduction</b>	<b>1</b>
<b>2</b>	<b>Getting Started</b>	<b>1</b>
2.1	Quick Start	1
<b>3</b>	<b>Overview</b>	<b>2</b>
<b>4</b>	<b>Your VM-2HD HD/SD - SDI DA</b>	<b>3</b>
<b>5</b>	<b>Connecting the VM-2HD HD/SD - SDI DA</b>	<b>4</b>
<b>6</b>	<b>Technical Specifications</b>	<b>5</b>

## Figures

Figure 1: VM-2HD HD/SD - SDI DA	3
Figure 2: Connecting the VM-2HD HD/SD - SDI DA	4

## Tables

Table 1: VM-2HD HD/SD - SDI DA Features	3
Table 2: Technical Specifications of the VM-2HD HD/SD - SDI DA	5

## 1 Introduction

Welcome to Kramer Electronics (since 1981): a world of unique, creative and affordable solutions to the infinite range of problems that confront the video, audio and presentation professional on a daily basis. In recent years, we have redesigned and upgraded most of our line, making the best even better! Our 500-plus different models now appear in 8 Groups<sup>1</sup>, which are clearly defined by function.

Congratulations on purchasing your Kramer Pico TOOLS **VM-2HD HD/SD - SDI DA**, which is ideal for:

- SDI production studios for signal distribution and equalizations
- Broadcast studios for on-air operation and SDI field production
- Using with SDI video sources such a professional digital camera

The package includes the following items:

- **VM-2HD HD/SD - SDI DA**
- Power adapter (12V DC Input)
- This user manual<sup>2</sup>

## 2 Getting Started

We recommend that you:

- Unpack the equipment carefully and save the original box and packaging materials for possible future shipment
- Review the contents of this user manual
- Use Kramer high performance high resolution cables<sup>3</sup>

### 2.1 Quick Start


This quick start chart summarizes the basic setup and operation steps.

---

1 GROUP 1: Distribution Amplifiers; GROUP 2: Video and Audio Switchers, Matrix Switchers and Controllers; GROUP 3: Video, Audio, VGA/XGA Processors; GROUP 4: Interfaces and Sync Processors; GROUP 5: Twisted Pair Interfaces; GROUP 6: Accessories and Rack Adapters; GROUP 7: Scan Converters and Scalers; and GROUP 8: Cables and Connectors

2 Download up-to-date Kramer user manuals from the Internet at this URL: <http://www.kramerelectronics.com>

3 The complete list of Kramer cables is on our Web site at <http://www.kramerelectronics.com>

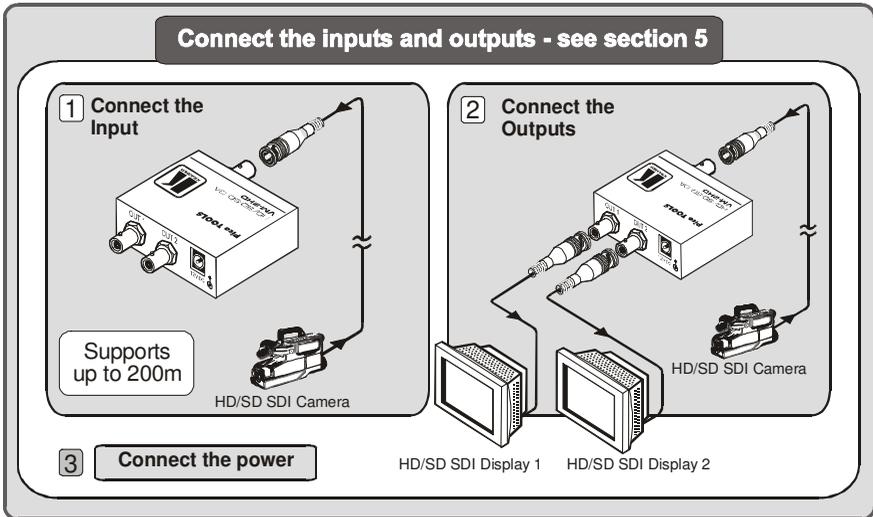

### 3 Overview

The **VM-2HD** *HD/SD - SDI DA* is a high performance 1:2 distributor for all SDI video signals.

In particular, the **VM-2HD**:

- Supports up to 200m
- Accepts one input and distributes the signal to two identical outputs using BNC connectors
- Has a video bandwidth of 1.485GHz that enables it to be used for standard definition and high definition serial digital video signals (SD/HD-SDI)
- Also passes digital information (embedded audio, Teletext, time code and so on) during the vertical interval period
- Is SMPTE 292M, 259M and 344M compliant and supports data rates of 143, 177, 270, 360, 540, 1483.5, 1485Mbps
- Provides automatic, multi-rate, equalization and reclocking for losses typical with long runs of 75Ω co-axial cable **up to 200m**
- Has LEDs indicating the SDI resolution

To achieve the best performance:

- Connect only good quality connection cables, thus avoiding interference, deterioration in signal quality due to poor matching, and elevated noise levels (often associated with low quality cables)
- Avoid interference from neighboring electrical appliances and position your **VM-2HD** away from moisture, excessive sunlight and dust



**Caution** – No operator-serviceable parts inside unit.

**Warning** – Use only the Kramer Electronics input power wall adapter that is provided with this unit<sup>1</sup>.

**Warning** – Disconnect power and unplug unit from wall before installing or removing device or servicing unit.

## 4 Your VM-2HD HD/SD - SDI DA

Figure 1 and Table 1 define the **VM-2HD HD/SD - SDI DA**:

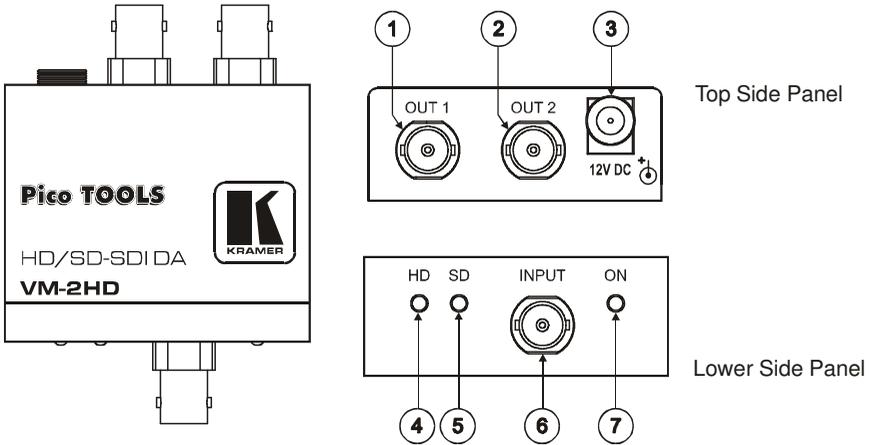


Figure 1: VM-2HD HD<sup>2</sup>/SD<sup>3</sup> - SDI DA

Table 1: VM-2HD HD/SD - SDI DA Features

#	Feature	Function
1	OUT 1 BNC connector	Connects to the SDI acceptor 1
2	OUT 2 BNC connector	Connects to the SDI acceptor 2
3	12V DC	+12V DC connector for powering the unit
4	HD <sup>2</sup> LED	Lights when the SDI signal is HD <sup>2</sup>
5	SD <sup>3</sup> LED	Lights when the SDI signal is SD <sup>3</sup>
6	INPUT BNC connector	Connects to the SDI source
7	ON LED	Lights when receiving power

<sup>1</sup> For example: model number AD2512C, part number 2535-000251

<sup>2</sup> High Definition (HD) means a video format, consisting of either 720 active lines of progressive video or 1080 lines of either progressive or interlaced video

<sup>3</sup> Standard Definition (SD) means an NTSC or PAL compatible video format, consisting of 480 (for NTSC) or 576 (for PAL) lines of interlaced video

## 5 Connecting the VM-2HD HD/SD - SDI DA

To connect the **VM-2HD**, as the example in Figure 2 illustrates, do the following:

1. Connect an HD-SDI/SD-SDI video source (for example, a camera) to the INPUT BNC connector.
2. Connect up to<sup>1</sup> two video OUT BNC connectors to the appropriate HD-SDI/SD-SDI video acceptors (for example, displays).
3. Connect the 12V DC power adapter to the power socket and connect the adapter to the mains electricity (not shown in Figure 2).

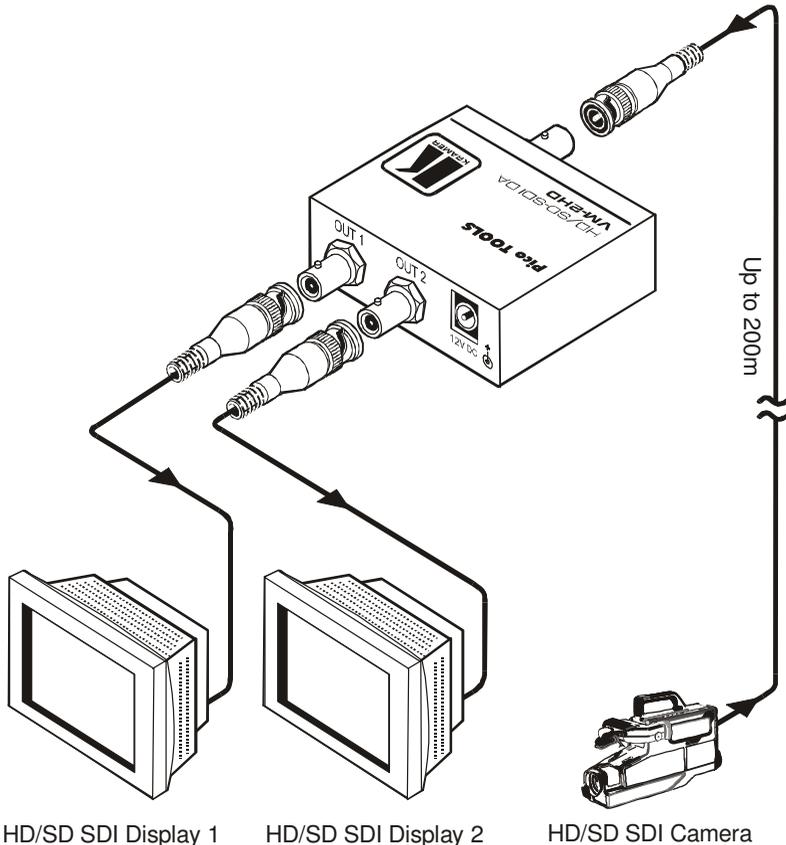


Figure 2: Connecting the VM-2HD HD/SD - SDI DA

<sup>1</sup> You do not have to connect both outputs

## 6 Technical Specifications

Table 2 includes the technical specifications:

*Table 2: Technical Specifications<sup>1</sup> of the VM-2HD HD/SD - SDI DA*

INPUT:	1 SMPTE-259M, 292M, 344M serial video, 75 ohms on a BNC connector
OUTPUTS:	2 equalized and reclocked SMPTE-259M, 292M, 344M outputs 75 ohms on BNC connectors
MAX. OUTPUT LEVEL:	800mVpp /75 ohms
COUPLING:	AC
POWER SOURCE:	12 V DC, 250mA
DIMENSIONS:	6.22cm x 5.24cm x 2.41 cm (2.45" x 2.06" x 0.95") W, D, H.
WEIGHT:	0.14 kg (0.31 lbs.) approx.
ACCESSORIES:	Power supply, mounting bracket

---

<sup>1</sup> Specifications are subject to change without notice

---

## LIMITED WARRANTY

Kramer Electronics (hereafter *Kramer*) warrants this product free from defects in material and workmanship under the following terms.

### HOW LONG IS THE WARRANTY

Labor and parts are warranted for seven years from the date of the first customer purchase.

### WHO IS PROTECTED?

Only the first purchase customer may enforce this warranty.

### WHAT IS COVERED AND WHAT IS NOT COVERED

Except as below, this warranty covers all defects in material or workmanship in this product. The following are not covered by the warranty:

1. Any product which is not distributed by Kramer, or which is not purchased from an authorized Kramer dealer. If you are uncertain as to whether a dealer is authorized, please contact Kramer at one of the agents listed in the Web site [www.kramerelectronics.com](http://www.kramerelectronics.com).
2. Any product, on which the serial number has been defaced, modified or removed.
3. Damage, deterioration or malfunction resulting from:
  - i) Accident, misuse, abuse, neglect, fire, water, lightning or other acts of nature
  - ii) Product modification, or failure to follow instructions supplied with the product
  - iii) Repair or attempted repair by anyone not authorized by Kramer
  - iv) Any shipment of the product (claims must be presented to the carrier)
  - v) Removal or installation of the product
  - vi) Any other cause, which does not relate to a product defect
  - vii) Cartons, equipment enclosures, cables or accessories used in conjunction with the product

### WHAT WE WILL PAY FOR AND WHAT WE WILL NOT PAY FOR

We will pay labor and material expenses for covered items. We will not pay for the following:

1. Removal or installations charges.
2. Costs of initial technical adjustments (set-up), including adjustment of user controls or programming. These costs are the responsibility of the Kramer dealer from whom the product was purchased.
3. Shipping charges.

### HOW YOU CAN GET WARRANTY SERVICE

1. To obtain service on you product, you must take or ship it prepaid to any authorized Kramer service center.
2. Whenever warranty service is required, the original dated invoice (or a copy) must be presented as proof of warranty coverage, and should be included in any shipment of the product. Please also include in any mailing a contact name, company, address, and a description of the problem(s).
3. For the name of the nearest Kramer authorized service center, consult your authorized dealer.

### LIMITATION OF IMPLIED WARRANTIES

All implied warranties, including warranties of merchantability and fitness for a particular purpose, are limited in duration to the length of this warranty.

### EXCLUSION OF DAMAGES

The liability of Kramer for any effective products is limited to the repair or replacement of the product at our option. Kramer shall not be liable for:

1. Damage to other property caused by defects in this product, damages based upon inconvenience, loss of use of the product, loss of time, commercial loss; or:
2. Any other damages, whether incidental, consequential or otherwise. Some countries may not allow limitations on how long an implied warranty lasts and/or do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations and exclusions may not apply to you.

This warranty gives you specific legal rights, and you may also have other rights, which vary from place to place.

**NOTE:** All products returned to Kramer for service must have prior approval. This may be obtained from your dealer. This equipment has been tested to determine compliance with the requirements of:

EN-50081:	"Electromagnetic compatibility (EMC); generic emission standard. Part 1: Residential, commercial and light industry"
EN-50082:	"Electromagnetic compatibility (EMC) generic immunity standard. Part 1: Residential, commercial and light industry environment".
CFR-47:	FCC Rules and Regulations: Part 15: "Radio frequency devices Subpart B – Unintentional radiators"

### CAUTION!

- ☒ Servicing the machines can only be done by an authorized Kramer technician. Any user who makes changes or modifications to the unit without the expressed approval of the manufacturer will void user authority to operate the equipment.
- ☒ Use the supplied DC power supply to feed power to the machine.
- ☒ Please use recommended interconnection cables to connect the machine to other components.



---

**For the latest information on our products and a list of Kramer distributors, visit our Web site: [www.kramerelectronics.com](http://www.kramerelectronics.com), where updates to this user manual may be found. We welcome your questions, comments and feedback.**



**Caution**

**Safety Warning:**

Disconnect the unit from the power supply before opening/servicing.



---

**Kramer Electronics, Ltd.**

Web site: [www.kramerelectronics.com](http://www.kramerelectronics.com)

E-mail: [info@kramerel.com](mailto:info@kramerel.com)

P/N: 2900-000194 REV 2